

TUBE LIGHT LINE

Heights: 60 - 80 - 100 mm

Properties


- Frame and cover are made of extruded aluminum profile and are easy to open with the lifting keys.
- At the bottom of the frame, a pre-mounted adapter can be connected to a PVC outlet pipe (diam. 250, 315, 400mm).
- Application: outdoor use.
- The cover is not screw tight.
- Standard equipped with a reinforcement mesh.
- The bottom is made of a 3mm galvanized steel plate (on request: bottom plate in 3mm aluminum).
- Two seals: one at the base and one in the side of the outer frame.
- The T rubber has three functions:
 - It prevents dirt between the cover and the frame.
 - The rubber's elastic effect avoids tension between the cover and the frame.
 - It offers an additional smell barrier.



Smell proof



Water proof

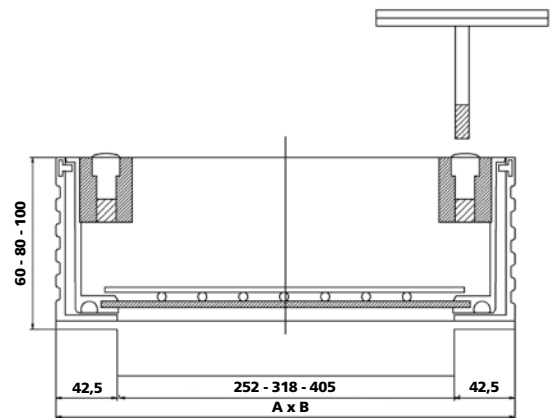

HEIGHT

Opening (mm)	Dimensions A x B (mm)	60 mm		80 mm		100 mm	
		Weight (kg)	Product no.	Weight (kg)	Product no.	Weight (kg)	Product no.
252	400 x 400	7.38	20035	8.10	20038	8.72	20041
318	500 x 500	10.97	20036	12.12	20039	12.86	20042
405	600 x 600	15.16	20037	16.44	20040	17.32	20043
Suitable for tiles		■		■		■	
Suitable for tiles and pavers				■		■	